



## NS.01 (205-102,5VDC) OVEREXCITATION BOX

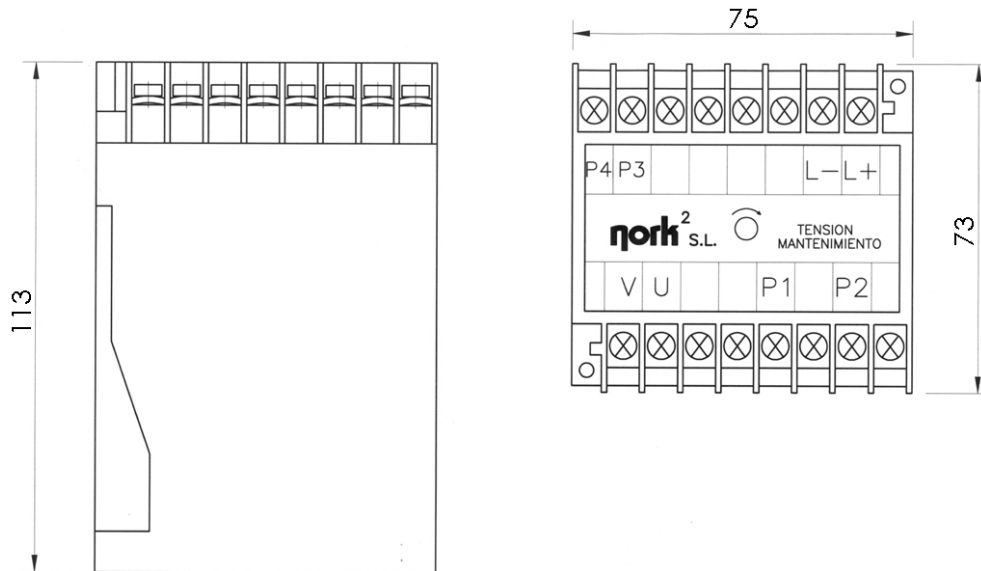


Overexcitation box.NS.01

POWER SUPPLY [VAC]	ADJUSTABLE HOLDING OUTPUT VOLTAGE [VDC]	ADJUSTABLE OVEREXC. TIME [s]	MAX. OVEREXCITATION CURRENT [A]	MAX. HOLDING CURRENT [A]
115	5-65	0,5-1,5	10	5
230	10-130			

### Normal switch-off time | Reduced switch-off time

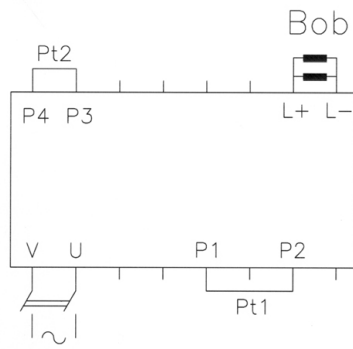

With Pt2: 115VAC  
Without Pt2: 230VAC

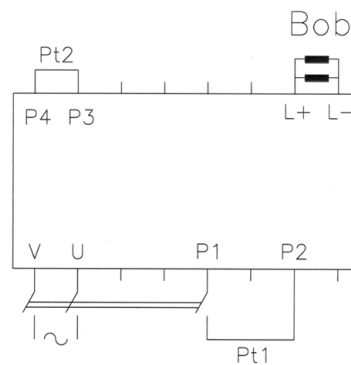

Pt1, Pt2: Bridge  
Bob: Electromagnet coil

